


SALEEN SERIES V.5 SUPERCHARGER KIT

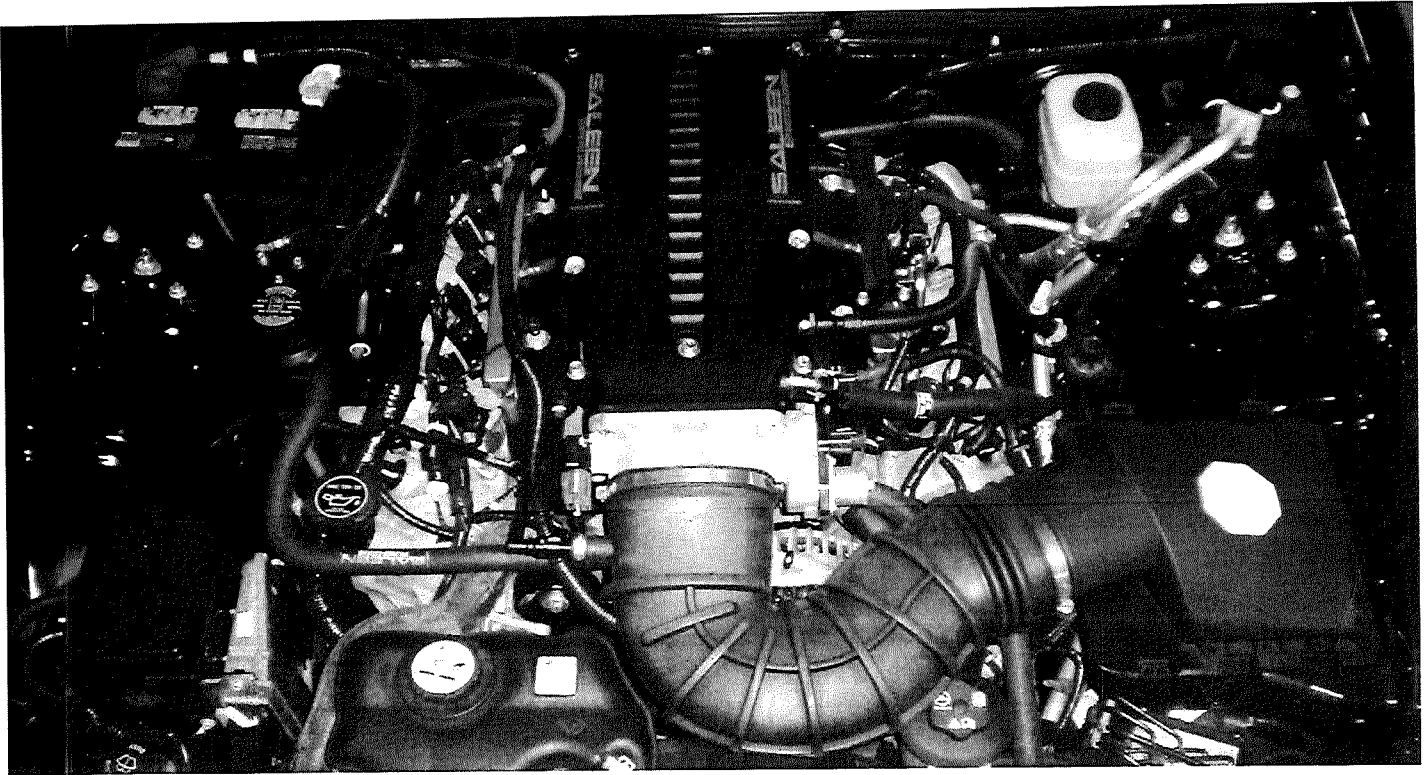

INSTALLATION MANUAL: Saleen S-Series / H-Series / Mustang GT

(S281 3V, H281 3V, & Mustang GT)

2005 - 2009 Model Year

P/N: 10-8002-C11517M



Saleen Performance Vehicles


1-800-888-8945

www.saleen.com

*Please keep this manual with the vehicle.


This manual contains maintenance, service, and parts information important to the operation of the motor and supercharger.

POWER IN THE HANDS OF A FEW.

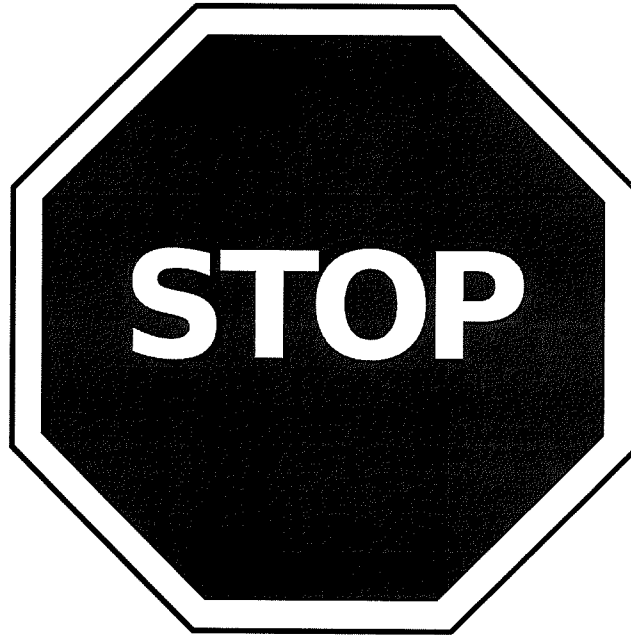


IF YOU ARE NOT EXPERIENCED IN THE AREA OF AUTOMOTIVE MECHANICS, WE STRONGLY URGE THAT YOU REFER THIS INSTALLATION TO A CERTIFIED INSTALLER OR TECHNICIAN.

ENSURE THE VEHICLE PARKING BRAKE IS ON AND THE TRANSMISSION IS IN PARK OR IN GEAR WHEN WORKING ON IT.

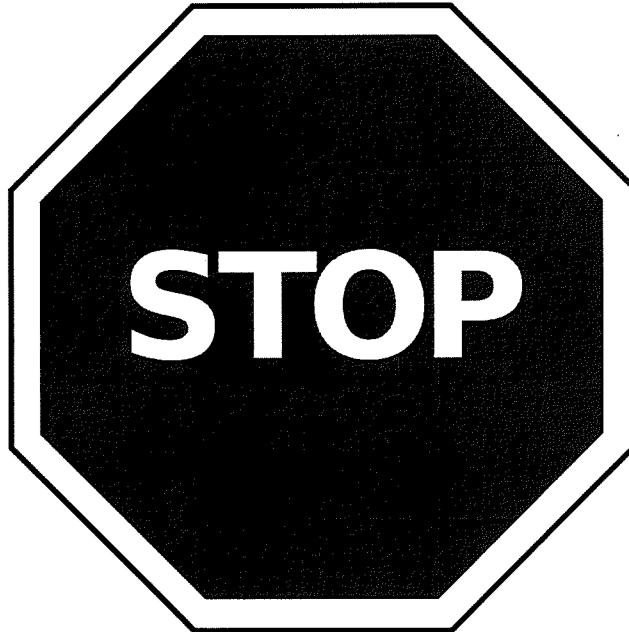

DO NOT INSTALL ANY AFTERMARKET CHIPS OR PROGRAMMERS, OR HAVE YOUR PCM REPROGRAMMED ANYWHERE BUT AT SALEEN FOR THIS SUPERCHARGER KIT. THE 2005 to 2009 MUSTANG USES AN ELECTRONIC THROTTLE CONTROL (ETC), WHICH IS CONTROLLED BY THE POWERTRAIN CONTROL MODULE (PCM) AND THE CALIBRATION INSIDE. AFTERMARKET CHIPS DO NOT PROPERLY RECALIBRATE THE ENGINE MANAGEMENT SYSTEM; THIS CREATES A DANGEROUS SITUATION THAT COULD RESULT IN A STUCK THROTTLE AND CAN LEAD TO INJURY OR DEATH. SALEEN FULLY REPROGRAMS THE PCM TO FORD STANDARDS, AND ENSURES THAT ALL ENGINE SAFETY CONTROLS ARE FULLY FUNCTIONAL.

SALEEN
SPEEDOLAB

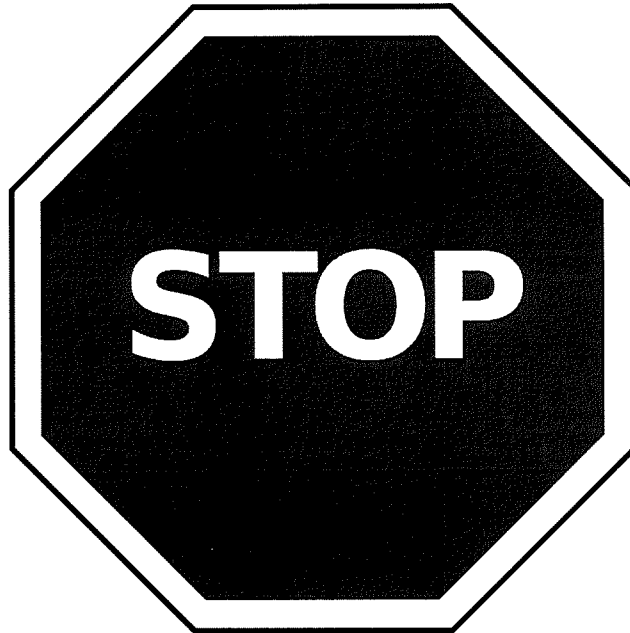

THE SALEEN SERIES VI.5 SUPERCHARGER AND ACCOMPANYING PROGRAMMING ARE DESIGNED AROUND THE USE OF 91 OCTANE FUEL OR HIGHER ONLY. BEFORE YOU RUN YOUR MUSTANG WITH THE SERIES VI KIT INSTALLED EVEN ONCE, YOU MUST EITHER DRAIN THE FUEL TANK COMPLETELY AND FILL IT UP WITH 91 OCTANE, OR BEGIN USING 91 OCTANE IN YOUR MUSTANG TWO COMPLETE FILLUPS BEFORE INSTALLATION.



Table of Contents

- B** (2005 to 2006 Model) **C** (2009 Model)
- B** (2007 to 2008 Model)
- D** (Saleen Naturally Aspirated Pulley Kit - S281 3V & H281 3V)
- E** (Stock Mustang GT Model) **H** (H - Series Model)
- F** (S - Series Model)

I. Table of Contents	Pg. I to II
II. Precautions (PLEASE READ CAREFULLY)	Pg. III
III. Introduction	Pg. IV
IV. Requirements	
1. Parts List	Pg. V to VIII
2. Tool List	Pg. IX
V. Tear-Down Instructions	
Battery & Tray Removal	Pg. 1
PCM Removal	Pg. 2
PCM Questionnaire	Pg. 3
Hood Removal	Pg. 4
E Front Fascia Removal (Stock)	Pg. 5E to 7E
F Front Fascia Removal (Saleen S-Series)	Pg. 5F to 7F
H Front Fascia Removal (Saleen H-Series)	Pg. 5G to 7G
Front Bump Isolator Removal	Pg. 8
Air Intake Tube & Air Box Removal	Pg. 9
Stock Serpentine Belt Removal	Pg. 10
Engine Coolant Removal	Pg. 11
Throttle Body Removal	Pg. 12
Fuel Rail Removal	Pg. 13 to 14
Intake Manifold Removal	Pg. 15 to 16
Alternator Removal	Pg. 17 to 18
H Upper Radiator Hoses Disconnection (2005 to 2006 Model)	Pg. 19A
B & C Upper Radiator Hose Removal (2007 to 2009 Model)	Pg. 19BC
Water Crossover Removal	Pg. 20
Water Tube Assembly Removal	Pg. 21
D Pulleys Replacement Process (Saleen N/A Pulley Kit Only)	Pg. 22D
Pulleys & Fasteners Removal	Pg. 23
H Coolant Hose Assembly Removal (2005 to 2006 Model)	Pg. 24A
RH (Passenger) Front Wheel Removal	Pg. 25
RH (Passenger) Front Fender Well Removal	Pg. 26
VI. Parts Assembly & Modification Instructions	
Fuel Rail & Injectors Installation	Pg. 27 to 28
Water Crossover Assembly	Pg. 29
H & B Alternator Pulley Replacement (2005 to 2008 Model)	Pg. 30AB to 31AB
C Alternator Pulley Replacement (2009 Model)	Pg. 30C to 31C
H & B Alternator Harness Modification (2005 to 2008 Model)	Pg. 32AB to 35AB
C Alternator Harness Modification (2009 Model)	Pg. 32C to 36C
Air Box Modification & Lid Assembly	Pg. 37 to 38



Table of Contents

- B** (2005 to 2006 Model) **C** (2009 Model)
- B** (2007 to 2008 Model)
- D** (Saleen Naturally Aspirated Pulley Kit - S281 3V & H281 3V)
- E** (Stock Mustang GT Model) **G** (H - Series Model)
- F** (S - Series Model)

VI. Installation Instructions

Water Pump Harness Installation: Routing	Pg. 39 to 40
RH (Passenger) Front Fender Well Installation	Pg. 41
RH (Passenger) Front Wheel Installation	Pg. 42
Water Pump Harness Installation: Wiring	Pg. 43 to 45
Idle Pulley Installation	Pg. 46
B Radiator Plumb. Conversion Kit (2005 to 2006 Model)	Pg. 47A
B & C I/C Recovery Tank Bracket Installation (2007 to 2009 Model)	Pg. 48BC
Lower Heater Core Hose Replacement	Pg. 49
B & C Heat Exchanger Installation (2007 to 2009 Model)	Pg. 50BC
B Heat Exchanger Installation (2005 to 2006 Model)	Pg. 50A
Intercooler Water Pump Installation	Pg. 51 to 53
Alternator Idle Pulley & Bracket Installation	Pg. 54 to 55
Water Tube Assembly Installation	Pg. 56
Engine Compartment Bulkhead Modification	Pg. 57
Engine Head Port Inspection	Pg. 58
Supercharger Assembly Installation	Pg. 59 to 60
Water Crossover Installation	Pg. 61 to 62
Alternator Installation	Pg. 63
Alternator Harness Installation	Pg. 64
Serpentine Belt Installation: Routing	Pg. 65
Vacuum Hoses Modification	Pg. 66 to 67
ACT Harness Installation	Pg. 68
Intercooler Water Pump to Recovery Tank Hose Installation	Pg. 69
Recovery Tank Installation	Pg. 70
Heat Exchanger Hose Installation	Pg. 71
Intercooler to Recovery Tank Hose Installation	Pg. 72
Throttle Body Installation	Pg. 73
Supercharger Assembly to Engine Connections	Pg. 74
Air Box & Intake Snorkel Installation	Pg. 75
E Front Fascia Installation (Stock)	Pg. 76E to 78E
F Front Fascia Installation (Saleen S-Series)	Pg. 76F to 78F
G Front Fascia Installation (Saleen H-Series)	Pg. 76G to 78G
Hood Installation	Pg. 79
Saleen Programmed PCM Installation	Pg. 80
Battery & Tray Installation	Pg. 81
Intercooler Coolant Fill	Pg. 82
Engine Coolant Fill	Pg. 83
Vehicle Decal Installation	Pg. 84

VII. Post-Installation

Post Installation Information	Pg. 85
-------------------------------	--------



Pre-Installation Precautions:

To help ensure the proper operation of your vehicle, follow the guidelines below:



IF YOU ARE NOT EXPERIENCED in the area of automotive mechanics, we strongly urge that you refer this installation to a certified installer or technician.

PAY ATTENTION TO VEHICLE TYPE NOTATION because there are installation steps in this manual that differ based on whether your vehicle is a Saleen S-Series product, Saleen H-Series product, or a factory Mustang GT*. Installation procedures also vary depending on the model year. There will be clear markings at the lower RH corner of the page (**A - G designations**). Taking the time to read these instructions along with following the notes will ensure a smooth, easy, and successful installation**.

*This instruction manual consists of the three most likely vehicle types for this kit (Saleen S-Line, Saleen H-Line, & Factory Stock Mustang). Saleen cannot anticipate what modifications may be done to every vehicle, so there may be an installation conflict with some aftermarket equipment.

**This manual was created during the production process, using the Saleen S2815C as an example. Any form of aftermarket body kits may require different or additional steps when removing body components (such as the front fascia or hood) may be different than the instructions listed in this manual. If the vehicle does contain other aftermarket body components, contact that aftermarket supplier for disassembly and assembly instructions.

Safety Precautions:

To help guarantee your safety, please follow the guidelines listed below:



NO SMOKING, FLAMES, OR SPARKS around the battery or fuel system. Batteries can give off fumes that are flammable and may ignite if there is any form of spark or open flame near it.



WEAR THE APPROPRIATE SAFETY GEAR such as safety glasses and gloves during the vehicle tear down and installation of new components. Always follow the safety instructions that come with the tools you are using.



USE CAUTION AROUND VEHICLE when working on it. Make sure the vehicle is turned **OFF**, is properly secured (in park or in gear with the parking brake on), and is sitting on a level surface.

If a hoist or floor jack is required, make sure the vehicle is in park or in gear and the parking brake on. If using a floor jack, make sure the vehicle is on a level surface, the rear tires are chocked, and the vehicle is being supported by jack stands. Follow ALL safety guidelines & operational instructions spelled out in the hoist or floor jack's owners manual. Failure to do so may result in serious injury.

Avoid wearing loose clothing or jewelry, as these items might get caught in moving parts resulting in injury. When instructed to operate your vehicle, make sure you do so in a well-ventilated area (to prevent carbon monoxide poisoning).

Be safe and use proper care and precautions. Saleen wants you to have a safe and rewarding experience.



Installation Guide 475 H.P. Series VI.5 Supercharger Kit 2005 to 2009

WELCOME!

Thank you for buying the newly improved Saleen 475HP Series VI.5 Supercharger Kit for your 2005 to 2009 Mustang (4.6 Liter, 3-Valve engine).

The new kit contains an improved water crossover design now with an integrated thermostat. The kit also includes a more efficient supercharger housing for improved flow characteristics. We appreciate your business, and we hope you enjoy your product.

For your benefit, please read the following instructions completely and thoroughly before attempting to install the supercharger kit. Many questions we have received from customers about the installation of our products could have been easily solved by information listed in this installation guide. We want you to enjoy this product in its fully functional state, and reading this tutorial is a great first step to getting you on your way to a more unique and powerful Mustang.

Please review the VERY IMPORTANT instructions below before proceeding with the kit installation.

- Please note that if you have ANY aftermarket parts already installed on your Mustang, or own a S281 3-Valve or H281 3-Valve (both naturally aspirated) you will need to return the vehicle to Stock Ford Mustang Status. This includes pulley, chips, programmers, etc... The vehicle will not function properly, and kit components may not fit properly if the vehicle is not returned to stock.
- Saleen recommends the use of HTO spark plugs ([Saleen Part#00-1601-C13394*](#)) with this kit, if your vehicle is produced from 2005 to early model year 2008. The HTO spark plug will not fit vehicles produced after December 1st 2007. To verify if your vehicle will accept HTO spark plugs, inspect a spark plug coil. If the coil has a brown plastic sleeve, HTO plugs are not available. If the coil is all black and does not have a brown sleeve, HTO plugs can be ordered through Saleen for your vehicle.
- We strongly urge that you have at least one person to help you install the supercharger, as the supercharger assembly is heavy, and the hood is too awkward to position alone. With enough help and at least one read of this installation guide, you should be well on your way to one hot Mustang!
- Finally, be sure that you fill out the processor questionnaire and return it to Saleen with your PCM! We cannot flash the PCM without that questionnaire!

Again, thank you for choosing Saleen!



PARTS INCLUDED IN SERIES VI.5 S/C KIT ~475 HP (2005 to 2006)

Below is a list of kit items and parts unique to the 2005 to 2006 model year kit. Page V will display all of the kit items and parts universal to all kits (2005 to 2009). If you have ordered a 2005 to 2006 Mustang Series VI Supercharger Kit, the parts below are included in your kit.

A	10-1607-B138260	SERIES VI.5 SC KIT, 475 HP, 2005-06 MUSTANG	1	EACH
	06-2001-B095680	HEAT EXCHANGER KIT	1	EACH
	06-2001-C09599	HEAT EXCHANGER S/C S197 MUSTANG	1	EACH
	00-9003-C001370	J ETNUT M8 x 1.25	4	EACH
	06-2001-B095710	RECOVERY TANK KIT	1	EACH
	00-2001-C099940	CAP TANK	1	EACH
	06-2001-C10212	TANK INTERCOOLER RECOVERY	1	EACH
	00-9001-C101410	CAPSCRW HEX FLNG M6x1.0mm 25mm FULL THRD Zn PL	3	EACH
	00-9004-C120070	WASHER, M6 ID 18MM OD, 18-8 SS	2	EACH
	00-9003-C109360	NUT NYLOC M6 10mm WIDTH 6mm HEIGHT	2	EACH
	06-1604-B098630	ALTERNATOR MOUNTING KIT	1	EACH
	06-1604-C09864	ALTERNATOR MOUNT MACHINED	1	EACH
	00-9003-C157270	NUT M8 X 1.25 DISTORTED THREAD LOCKNUT ZN PLATED	3	EACH
	00-9004-C157320	WASHER AN SS 5/16" ALTERNATOR MOUNT	3	EACH
	00-9002-C110890	STUD ST BLCK OX M8x1.25x110mm UNEQUAL 31mm&12mm THD LGTH	1	EACH
	00-9002-C110900	STUD, ST BLACK OXIDE, M8 x 1.25 x 65mm 20mm THRD LNGTH	1	EACH
	00-2002-C100910	STUD, ST BLACK OXIDE, M8 x 1.25 x 110mm	1	EACH
	00-9001-C106650	CAPSCRW HEX FLNG M8x1.25mm 40mm CL 8.8 FULLY THRD Zn PL	2	EACH
	00-1706-C153230	STANDOFF, ALTERNATOR WIRE	1	EACH
	00-1703-C070870	DUAL WALL HEAT SHRINK 1/2" RED	1	INCH
	06-1604-C09936	ALTERNATOR PULLEY S/C S197 MUSTANG	1	EACH
	00-9004-C111460	WASHER 17mm ID 40mm OD 1.6mm THICK Zn PL	1	EACH
	00-9003-C102610	NUT HEX J AM M16x1.5x8mm Zn PL	1	EACH
	00-3105-C115760	ALT PULLEY TOOL	1	EACH
	06-2003-C143820	GASKET, WATER CROSSOVER, DRVR, 2007 MUSTANG	1	EACH
	00-2003-C19338	COOLANT HOSE ASSEMBLY	1	EACH
	00-2003-C19363	THERMOSTAT 2007 to 2010	1	EACH
	06-2003-C143810	O-RING, THERMOSTAT	1	EACH
	00-1703-C070870	DUAL WALL HEAT SHRINK 1/2" RED	3	INCH
	00-1704-C110830	SLEEVING, CONVOLUTED 1/2" BLACK	8.5	INCH
	00-1704-C063000	HEAT SHRINK, DUAL WALL 1/8" BLACK	13.5	INCH
	00-1703-C070810	WIRE, 4 AWG RED	10	INCH
	00-1703-C162470	SPLICE, NON-INSULATED SEAMLESS 6 AWG BUTT	1	EACH
	00-1703-C070900	TERMINAL, RING 4 AWG FOR 1/4" STUD	1	EACH
	00-1704-C093820	WIRE, 20 AWG YELLOW	12.25	INCH
	00-1704-C129750	WIRE, 20 AWG YELLOW/BLUE	12.25	INCH
	00-1704-C157540	WIRE, 20 AWG ORANGE/BLUE	12.25	INCH
	00-1704-C092600	SPLICE, NON-INSULATED SEAMLESS 18-20 AWG BUTT	9	EACH



PARTS INCLUDED IN SERIES VI.5 S/C KIT ~475 HP (2007 to 2008)

Below is a list of kit items and parts unique to the 2007 to 2008 model year kit. Page V will display all of the kit items and parts universal to all kits (2005 to 2009). If you have ordered a 2007 to 2008 Mustang Series VI Supercharger Kit, the parts below are included in your kit.

B	10-1607-B150580	SERIES VI.5 SC KIT, 475 HP, 2007-08 MUSTANG, A/M	1	EACH
	06-2001-B150880	HEAT EXCHANGER KIT	1	EACH
	06-2001-C09599	HEAT EXCHANGER S/C S197 MUSTANG	1	EACH
	00-9003-C157270	NUT M8 X 1.25 DISTORTED THREAD LOCKNUT ZN PLATED	4	EACH
	00-9004-C001740	WASHER FLAT M8 ST	4	EACH
	00-9001-C135810	BOLT M8x1.25mm 30mm CL 8.8 Zn PL FLANGE	2	EACH
	00-9004-C114890	WASHER FLAT M8 24mm OD 2mm THK Zn PL	2	EACH
	06-2001-B095710	RECOVERY TANK KIT	1	EACH
	00-2001-C099940	CAP TANK	1	EACH
	06-2001-C10212	TANK INTERCOOLER RECOVERY	1	EACH
	00-9001-C101410	CAPSCRW HEX FLNG M6x1.0mm 25mm FULL THRD Zn PL	3	EACH
	06-1604-B098630	ALTERNATOR MOUNTING KIT	1	EACH
	06-1604-C09864	ALTERNATOR MOUNT MACHINED	1	EACH
	00-9003-C157270	NUT M8 X 1.25 DISTORTED THREAD LOCKNUT ZN PLATED	3	EACH
	00-9004-C157320	WASHER AN SS 5/16" ALTERNATOR MOUNT	3	EACH
	00-9002-C110890	STUD ST BLCK OX M8x1.25x110mm UNEQUAL 31mm&12mm THD LGTH	1	EACH
	00-9002-C110900	STUD, ST BLACK OXIDE, M8 x 1.25 x 65mm 20mm THRD LNGTH	1	EACH
	00-2002-C100910	STUD, ST BLACK OXIDE, M8 x 1.25 x 110mm	1	EACH
	00-9001-C106650	CAPSCRW HEX FLNG M8x1.25mm 40mm CL 8.8 FULLY THRD Zn PL	2	EACH
	00-1706-C153230	STANDOFF, ALTERNATOR WIRE	1	EACH
	00-1703-C070870	DUAL WALL HEAT SHRINK 1/2" RED	1	INCH
	06-1604-C09936	ALTERNATOR PULLEY S/C S197 MUSTANG	1	EACH
	00-9004-C111460	WASHER 17mm ID 40mm OD 1.6mm THICK Zn PL	1	EACH
	00-9003-C102610	NUT HEX J AM M16x1.5x8mm Zn PL	1	EACH
	00-3105-C115760	ALT PULLEY TOOL	1	EACH
	06-2003-C143790	HOSE, UPPER RAD PASS, 2006 MUSTANG	1	EACH
	00-1703-C070870	DUAL WALL HEAT SHRINK 1/2" RED	3	INCH
	00-1704-C110830	SLEEVING, CONVOLUTED 1/2" BLACK	8.5	INCH
	00-1704-C063000	HEAT SHRINK, DUAL WALL 1/8" BLACK	13.5	INCH
	00-1703-C070810	WIRE, 4 AWG RED	10	INCH
	00-1703-C162470	SPLICE, NON-INSULATED SEAMLESS 6 AWG BUTT	1	EACH
	00-1703-C070900	TERMINAL, RING 4 AWG FOR 1/4" STUD	1	EACH
	00-1704-C093820	WIRE, 20 AWG YELLOW	12.25	INCH
	00-1704-C129750	WIRE, 20 AWG YELLOW/BLUE	12.25	INCH
	00-1704-C157540	WIRE, 20 AWG ORANGE/BLUE	12.25	INCH
	00-1704-C092600	SPLICE, NON-INSULATED SEAMLESS 18-20 AWG BUTT	9	EACH



PARTS INCLUDED IN SERIES VI.5 S/C SUPPLEMENTAL KIT ~ 2009

Below is a list of kit items and parts unique to the 2009 model year. Page V will display all of the kit items and parts universal to all kits (2005 to 2009). If you are installing a Saleen Series VI.5 Supercharger Kit on a 2009 Mustang, the parts below are included in the supplemental kit. Otherwise, the kit is the same as a 2007-2008 kit.

06-1604-B19222	2009 SUPPLEMENTAL KIT, SUPERCHARGER	1	EACH
06-1604-C18921	ALTERNATOR PULLEY S/C S197 2009	1	EACH
00-9004-C18923	WASHER, M14 FLAT	1	EACH
00-9003-C18922	NUT, HEX M14x1.50	1	EACH
00-1607-C146160	GASKET, INTAKE MANIFOLD TO HEAD, MUSTANG	8	EACH



PARTS INCLUDED IN SERIES VI.5 S/C KIT ~475 HP (UNIVERSAL)

Below is a list of kit items and parts that are universal to all model year kits (2005 to 2009)

06-2002-B095960	WATER PUMP KIT	1	EACH
00-2002-C099910	INTERCOOLER WATER PUMP, '05 S281	1	EACH
06-2002-C09888	BRACKET WATER PUMP 05 S281	1	EACH
00-9001-C100640	CAPSCRW HEX FLNG M8x1.25mm 20mm CL 8.8 FULL THRD Zn PL	1	EACH
00-9003-C157270	NUT M8 X 1.25 DISTORTED THREAD LOCKNUT ZN PLATED	2	EACH
00-9004-C001740	WASHER FLAT M8 ST	2	EACH
00-9001-C114650	CAPSCRW HEX HD M8x1.25x50 FULL THRD CI 10.9 Zn PL	2	EACH
00-9004-C114890	WASHER FLAT M8 24mm OD 2mm THK Zn PL	2	EACH
06-2002-C11237	SPACER WATER PUMP BRACKET	2	EACH
06-1704-B16574	HARNESS, '05-'09 MUSTANG (S281 SC & S281 E) WATER PUMP	1	EACH
06-2003-B098560	HOSE KIT S/C 4.6 3V	1	EACH
06-2003-C09857	MOLDED HOSE S/C TANK TO PUMP	1	EACH
069-950	3/4" HEATER HOSE	7.5	INCH
06-2003-C09860	MOLDED HOSE S/C INTERCOOLER TO TANK	1	EACH
06-2003-C09861	MOLDED HOSE S/C H.E TO INTERCOOLER	1	EACH
00-2003-C100680	HOSE CLAMP MOLDED HOSE S/C 2005 MUSTANG	8	EACH
06-2003-B19367	WATER CROSSOVER KIT - SERIES VI.5	1	EACH
00-9001-C101410	CAPSCRW HEX FLNG M6x1.0mm 25mm	4	EACH
00-9001-C19336	CAPSCRW HEX FLNG M6x1.0mm 80mm	1	EACH
00-9001-C19335	CAPSCRW HEX FLNG M6x1.0mm 60mm	1	EACH
00-9004-C19337	M6 WASHER	2	EACH
069-950	3/4" HEATER HOSE	6	INCH
00-2003-C100680	3/4" HOSE CLAMP	2	EACH
00-2003-C19335	WATER NECK, WATER CROSSOVER	1	EACH
00-2003-C19336	WATER CROSSOVER SERIES VI.5	1	EACH
00-1607-B19330	SUPERCHARGER SERIES VI.5 ASSEMBLY, 475 H.P., S197 MUSTANG	1	EACH
06-1704-B12563	HARNESS, '05-'09 MUSTANG (S281 SC & S281 E) ACT CONNECTOR	1	EACH
06-1602-C15559	AIR INLET DUCT	1	EACH
06-1602-C13093	AIR BOX COVER 2006 S281	1	EACH
00-1701-C120760	FUEL INJECTOR	8	EACH
00-9001-C101410	CAPSCRW HEX FLNG M6x1.0mm 25mm FULL THRD Zn PL	12	EACH
00-9005-C18840	SPRING CLAMP, 7/16IN SS	1	EACH
00-1604-C111700	GOODYEAR GATERBACK 109.0" 6 RIB BELT	1	EACH
06-2003-C09925	WATER TUBE MUSTANG	1	EACH
178-428	ALTERNATOR IDLER PULLEY, 76MM	1	EACH
00-1604-C099580	IDLER PULLEY, 76MM, GUIDED	1	EACH
10-8003-C12466	STICKER NEON ORANGE 3"x11.5" PCM BOX	1	EACH
10-8003-C12239	(BOX) PCM 2005 MUSTANG	1	EACH
06-9101-C11353	LABEL BELT DIAGRAM SC	1	EACH
069-703	14" ZIP TIE	1	EACH
00-9007-C10122*	7" ZIP TIE	4	EACH



TOOLS REQUIRED FOR KIT INSTALLATION:

3/8" Drive - Torque Wrench	90 Degree Pick
3/8" Drive - Ratchet	Panel Puller
3/8" Drive - 6" Extension	Short Phillips Head Screwdriver
5mm Socket	Flat Blade Screwdriver
12mm Deep Socket	Wire Stripper / Crimper
13mm Deep Socket	Heat Gun (For Heat Shrink)
15mm Socket	Air Saw or Hack Saw
3/8" Deep Socket	Coolant System Pressure Tool
13mm Ratcheting wrench	2 Gallon Bucket
1/4" Drive - Torque Wrench	Hose Clamp Pliers
1/4" Drive - Ratchet	Pliers
1/4" Drive - 8" Extension	Fiber Stick
5.5mm Socket (1/4" Drive)	1/2" Drive Impact
8mm Socket (1/4" Drive)	1/2" Drive Breaker Bar
8mm Deep Socket (3/8" Drive)	1/2" Drive 17mm Impact Socket
10mm Socket (1/4" Drive) Deep Socket	1/2" Drive 24mm Impact Socket
10mm Socket (1/4" Drive) Shallow Swivel Socket	1/2" Drive 22mm Impact Socket
3/8" Drive 5/16" Allen Tool	Fuel Line Disconnect Tool
3/8" Drive 5mm Allen Tool	Blue Loctite
3/8" Drive 6mm Allen Tool	Red Loctite
1/4" Drive 3/16" Allen Tool	Pen Light
1/4" Drive 4mm Allen Tool	Mechanics Magnet
T15 Torx Bit	

NOTE: If you do not have any of the tools listed above, you may be able to obtain them from your local tool lending service

TODAYS DATE: / /

PROCESSOR QUESTIONNAIRE

2005 - 2009 MUSTANG

SHIP TO ADDRESS FOR PCM (PLEASE NO P.O. BOXES)

CONTACT NAME:			DEALER NAME:		
SHIPPING ADDRESS:			PHONE NUMBER:		
CITY:	STATE:	ZIP:	EMAIL:		
CUSTOMERS NAME:			TECH SUPPORT (IF ONE WAS GIVEN)		
			SALEEN REPORT#		

VIN:																			
VEHICLE YEAR:		VEHICLE MODEL:				VEHICLE BUMPER#				VEHICLE MILEAGE:									
TIRE MANUFACTURER:				REAR TIRE SIZE:															
TRANSMISSION >		AUTO <input type="checkbox"/>	MANUAL <input type="checkbox"/>	5 SPEED <input type="checkbox"/>	6 SPEED <input type="checkbox"/>	ENGINE SIZE:		REAR GEAR RATIO: <small>(please look at vehicle)</small>											

SELECT THE SALEEN PERFORMANCE LEVEL THAT IS INSTALLED ON YOUR VEHICLE

S281 3V <input type="checkbox"/>	S281 SC BLACK INJ. 435 HP <input type="checkbox"/>	S281 SC BLUE INJ. 465 HP <input type="checkbox"/>	S281 SC AMERICAN FLAG <input type="checkbox"/>	S281 SC RED FLAG <input type="checkbox"/>	S281 SC DAN GURNEY <input type="checkbox"/>	S281 SC SLEEPER <input type="checkbox"/>
S281 EXTREME 550 HP <input type="checkbox"/>	S281 EXTREME 575 HP <input type="checkbox"/>	S281 EXTREME 600 HP <input type="checkbox"/>	S302 3V PARNELLI J ONES <input type="checkbox"/>	S302 SC EXTREME <input type="checkbox"/>	S302 SC 25TH STERLING <input type="checkbox"/>	
H281 3V <input type="checkbox"/>	H302 3V <input type="checkbox"/>	H302 SC <input type="checkbox"/>	SUPERCHARGE KIT 475 HP <input type="checkbox"/>	OTHER NOT LISTED <input type="checkbox"/>		

SALEEN AIR INTAKE MODIFICATION INFORMATION

SHAPE OF INTAKE TUBE AT AIRBOX: **ROUND** **OVAL**

OTHER MODIFICATION / AFTERMARKET PARTS INSTALLED - NON SALEEN

e.g. HEADERS, INTAKES, AIR OR FUEL MANAGEMENT, EXHAUST, OTHER CAL. 'TUNERS'

PLEASE LIST ALL ITEMS:

REASON FOR PROGRAMMING --- DO NOT LEAVE BLANK

PLEASE EXPLAIN:

SHIP PCM TO >	SALEEN - PCM PROGRAMMIG	SHIP (N) (G) SL (Y) (N) TAG	
"SEND PCM"	33603 Dequindre Rd.	REC _____	OLD _____
"OVERNIGHT"	Troy MI, 48083	SENT _____	NEW _____

CONTACT NUMBERS: **DIRECT: 1.800.888.8945 ext 2101** **FAX: 1.248.499.5333**


10/21/2009

**** PLEASE INCLUDE THIS WITH THE PCM YOU ARE SHIPPING ****

OPERATION

10 With a panel puller, remove the 6 retainer pins holding the top aero shield in place.

20 Remove the aero shield.

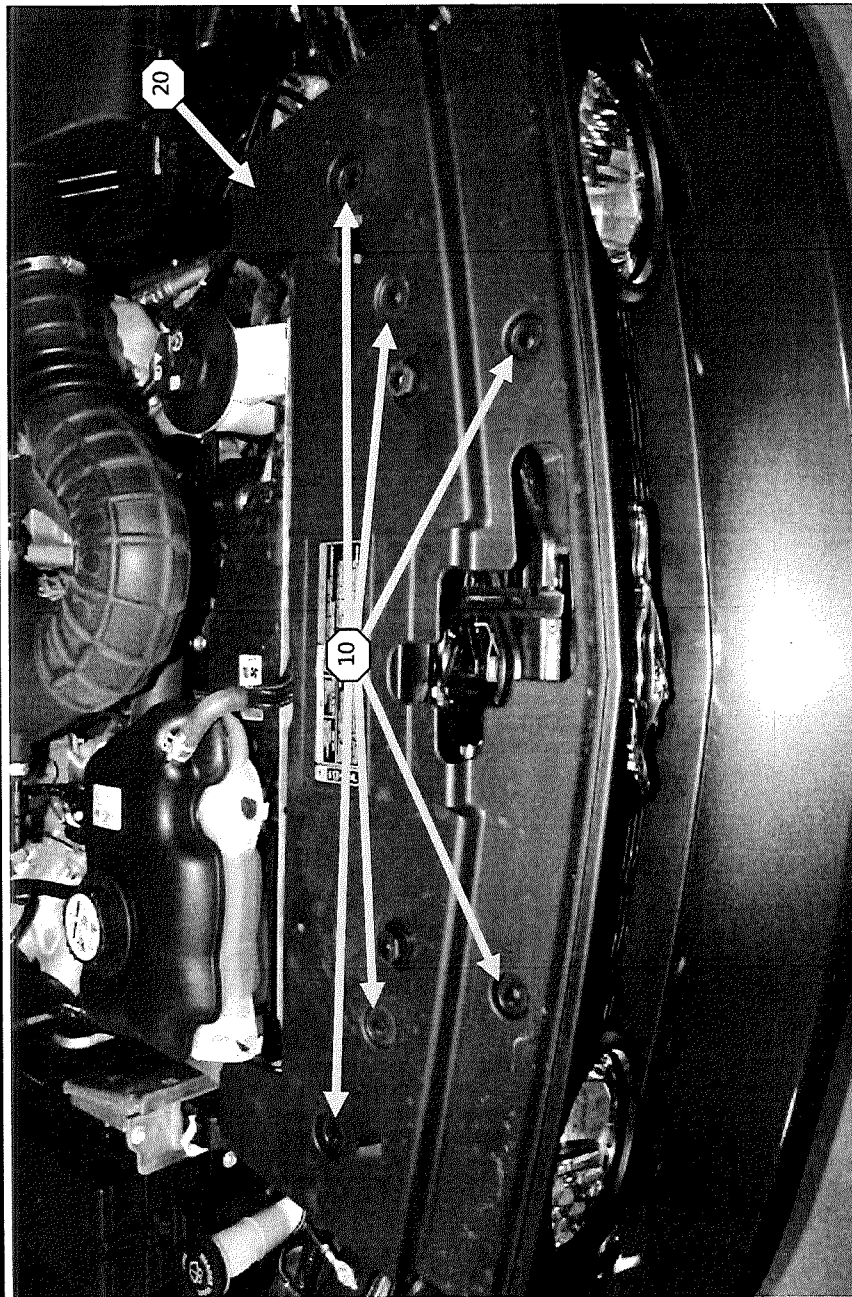

TORQUE

ITEM

ITEM PART NUMBER QTY. DESCRIPTION

ITEM	PART NUMBER	QTY.	DESCRIPTION

TORQUE

NOTES:

SALEEN SPEEDLAB

PAGE

REMOVE FRONT FASCIA

SALEEN H-SERIES

5

